


Table of Contents

Intervenors' Response to Staff's Second Data Request.....2

Applicant's Response to Staff's Fifth Data Request.....16
Attachment 5-4, Sound Level Contours Map.....22

Applicant's Response to Staff's Sixth Data Request.....23
Attachment 6-2b, Turbine Distance to Residence...26
Attachment 6-2c, Turbine Distance to Residence...27



**BEFORE THE PUBLIC UTILITIES COMMISSION
OF THE STATE OF SOUTH DAKOTA**

**IN THE MATTER OF THE
APPLICATION BY PREVAILING
WIND PARK, LLC FOR A PERMIT OF
A WIND ENERGY FACILITY IN BON
HOMME COUNTY, CHARLES MIX
COUNTY AND HUTCHINSON
COUNTY, SOUTH DAKOTA, FOR THE
PREVAILING WIND**

*
*
*
*
*
*
*
*
*

**INTERVENORS' RESPONSES TO
STAFF'S SECOND SET OF DATA
REQUESTS TO INTERVENORS**

EL18-026

Intervenors Gregg Hubner, Marsha Hubner, Paul Schoenfelder, and Lisa Schoenfelder (“Intervenors”), through counsel, provide the following Responses to Applicant Prevailing Wind Park, LLC’s (“Applicant”) Second Set of Data Requests to Intervenors.

- 2-1) Refer to the Intervenor’s response to Staff Data Request 1-4. The Intervenors “recommend a 2-mile setback from non-participating residences and a 1,500 ft. setback from a property line and public rights-of-way with waivers available for those who want them closer.” Please provide references to the direct testimony, including page and line numbers, submitted by Richard R. James, Jerry L. Punch, and Prof. Mariana Alves-Pereira, that support this condition.**

RESPONSE:

Gregg Hubner: I was advocating for a 2-mile setback since the spring of 2015. My first support for this idea was from the book “Wind Turbine Syndrome” by Dr. Nina Pierpont, MD, PhD on page 254. (Attachment A) In the Shirley Wind Farm in Brown County, Wisconsin, infrasound was detected 6.2 miles away from the turbine, with complaints at 4.2 miles. The Shirley Wind Farm was designated a “human health hazard” in 2014 by the Brown County Board of Health. <https://www.michigancapitolconfidential.com/20690>.

Also, I am attaching a study on blade and ice throw that shows these throw distances can be up to 6500 ft. (Attachment B)

In August of 2017 I met Vicki May, who lives about an hour south of us in Nebraska. She lives 1 1/3 miles from the closest of 200 wind turbines. I have been to her place and in her home. I heard her testimony in front of the State of Nebraska Natural Resources Committee in September of 2017. (Attachments C and D) Early in 2018 I got a call from Jerome Powers who suffers from some symptoms of WTS. He lives well over a mile and a half from the Beethoven Wind Farm. It makes sense to me to listen to people that live in a wind farm and under these conditions than some computer model or highly educated person that has never lived near a wind farm. I do know certain people have ill effects up to 4.2 miles away (Shirley Wind Farm). It makes sense to me to error on the side of caution since the only recourse for a resident who suffers problems is to move from his home. Walworth County, South Dakota has a 2-mile setback.



2-2) Refer to the direct testimony of Mr. Richard James, Page 2, line 55. Is compliance with the Bon Homme County’s noise regulation associated with wind energy systems achieved through a sound model based on predicted sound levels, or is compliance based on actual sound levels? Please explain.

RESPONSE:

Reece Almond: Section 1741 of the Bon Homme County Zoning Ordinance addresses what a LWES must do in order to comply with the Ordinance. Section 1741 provides:

Noise level produced by the LWES shall not exceed forty five (45) dBA, average A-weighted sound pressure at the perimeter of occupied residences existing at the time the permit application is filed, unless a signed waiver or easement is obtained from the owner of the residence.

The permittees shall submit a report of predicted noise levels at habitable residential dwellings within one mile of proposed tower locations to the Board no less than forty five (45) days prior to commencing construction.

Based on this language and my interpretation thereof, the answer to the question in Data Request 2-2 is both.

Richard James: Models are, at best, approximations of what be expected if the project is constructed. Measurements are the only accurate method for assessing whether a project complies with a regulation. It is the developer's responsibility to understand the limitations of the models, and to apply appropriate safety factors to the design to accommodate the limitations of the model such that once operating, the measured sound levels do not exceed the regulatory limit. Models cannot substitute for measurements.

2-3) Refer to the direct testimony of Mr. Richard James, Page 3, lines 101, through Page 4, 105.

- a) Have any U.S. counties or states adopted the Intervenor’s recommended maximum sound level regulation for wind energy facilities of 35 dBA? Please provide documentation to support the response.**
- b) Have any U.S. counties or states adopted the Intervenor’s recommended sound level regulation for wind energy facilities of no more than 5 dBA louder than the pre-operational background sound levels? Please provide documentation to support the response.**

RESPONSE:

Gregg Hubner: Here are some setback distances used around the world, with examples both from residences and property lines:
http://www.wiseenergy.org/Energy/Wind_Ordinance/Setbacks.pdf.

Here are some decibel limits used around the world:
http://wiseenergy.org/Energy/Health/Acoustical_Limit.pdf.

Richard James: I do not maintain a comprehensive list of regulatory limits and documents. My response is thus an example of regulations in jurisdictions where I have had some involvement. First, it needs to be understood that a good regulatory limit to control noise in a community must address the characteristic of the noise source that is considered to be objectionable. For utility scale wind turbines those characteristics are amplitude modulation (fluctuations) of the sound pressure levels and tones particularly in the infrasonic and low frequency range. It is accepted in acoustics that fluctuating sounds are more annoying and more likely to cause sleep disturbance than steady sounds. The presence of audible tones also increase annoyance potential and sleep because the human auditory function is about 10 dB more sensitive to tones than to broadband sound. Thus, the ideal regulatory limit for wind turbines would be a not-to-exceed sound level measured with an instrument set to measure the current sound without any averaging. If the regulation is using a single number limit in dBA this would be expressed as dBA $L_{MaxFast}$. That is the maximum dBA level using the meter's fast response. However, many jurisdictions, and the wind industry have attempted to apply thresholds based on the long-term average sound level (L_{eq}) which does not reflect the fluctuations that are present in wind turbine noise emissions. Long term normally means a measurement averaged over a period of ten minutes to one hour, but can also mean over periods of days and nights.

Field measurements of wind turbine sound has demonstrated that the $L_{MaxFast}$ measurement will exceed the L_{eq} measurement by 10 dB or more under normal operating conditions. These conditions normally occur at night during the time when people are expecting quiet for sleep. Dr. Punch provides an example of this from the Michigan, Almer Township case where the US District court accepted that the ordinance limiting wind turbine noise to 45 dBA $L_{MaxFast}$ was acceptable. The acoustician for the developer had filed statements saying that the equivalent average sound level (L_{eq}) would need to be 11 dBA lower than this limit to comply. Since the primary adverse health impact from noise is sleep disturbance and studies have shown that fluctuating sounds outside a home when windows are open cause awakenings and delay return to sleep when they exceed 40 dBA $L_{MaxFast}$ jurisdictions that are required to set thresholds to protect public health have variously adopted limits ranging from 35 dBA L_{eq} to 45 dBA $L_{MaxFast}$. All of them are roughly equivalent in terms of protection, but the $L_{MaxFast}$ thresholds are more specific to the character of the sounds that need to be controlled.

This type of threshold is also easier to enforce. It is like how highway speeds are enforced. For example, if a driver on a road with a speed limit of 70 miles per hour averages 70 mph during the entire trip, but during part of the drive is exceeding that limit when a police radar tracks the car there is a violation. If the police officer was required to show that the driver's average speed exceeded 70 mph the limits would become unenforceable. They would need to follow the driver for long periods and the driver's knowledge of being under surveillance could lead to modified driving behavior. The same happens when a jurisdiction sets an average sound level (L_{eq}) as the threshold. First, the measurements needed to confirm the exceedance become burdensome and subject to argument. Second, the applicant can raise all sorts of arguments about the period of time being averaged, length of the average, etc.. Thus, the use of limits set to control the maximum sound emissions are more direct and result in less burden on the local

government if or when complaints are filed. This line of reasoning has been applied in many jurisdictions who have re-written their wind turbine regulations to control the fluctuating character of wind turbine noise.

In response to part A of the question I refer back to Table 3 in my first statement's Exhibit "Noise: Wind Farms." It shows that many countries where the wind industry has installed large projects have regulations set around the 35 dBA Leq threshold. Germany, Australia and New Zealand all have limits based on some form of 35 dBA average sound level and this has not prevented development of wind energy projects. In response to Part B regarding jurisdictions that use Background plus 5 dB method Table 3 shows this is also a common threshold. Some jurisdictions in the US also use background plus a constant (5, 6 or 10). For example, Oregon developed wind energy project sound limits in the early 2000s using a limit of 10 dB over the background sound as the goal. After doing a number of tests for background sound levels Oregon concluded that the background sound level in rural/wilderness locations where wind turbines were likely to be installed were about 25 dBA (L90). Thus, they adopted a limit 35 dBA (L50). New York's Noise Guidelines call for the new noise source to not increase the background sound levels by more than 6 dBA. Massachusetts uses 10 dBA but has some local rules using lower levels.

Tennessee recently adopted a state regulation of 35 dBA $L_{MaxFast}$ at the receptor's dwelling and 45 dBA $L_{MaxFast}$ at the property line.

In Michigan, regulations are set by counties, but each township has the right to set different limits under state law. Most of the wind turbines in Michigan are located in Huron County, which is the "thumb" region on the east side located between Saginaw Bay and Lake Huron. The County originally had limits of 50 dBA which attracted considerable development starting back in 2007. Because of the problems with complaints of annoyance and adverse health effects that have occurred in townships where the projects were located many of the remaining townships have adopted their own regulations setting not-to-exceed limits ranging from 30 to 45 dBA $L_{MaxFast}$. Those townships include:

Townships in Huron County

Almer Effectively 45 LA_{Max} at the non-participating property line (day), 39 LA_{Max} (night)
Ellington 40 LA_{Max} at non-participating property line
Denmark Shall not exceed 35 dBA at property line
Merritt 40 dBA (LA_{Max}) at property line
Sand Beach 35 dBA (LA_{Max}) during day and 30 dBA at night
Marion 40 LA_{Max} at non participating property line
Bridgehampton 40 LA_{Max} at non-participating property line
Elmwood 40 LA_{Max} at non-participating property line
Kingston 45 LA_{Max} at non-participating property line
Greenwood Shall not exceed 45 dB(A) at any property line adjacent to the wind energy system

Other Michigan Townships and Counties (not exhaustive)

Ingersoll Twp 45 LA_{Max} at non-participating property line (day) 35 LA_{Max} at property line (night) at same
Beaver Twp 45 LA_{Max} at non-participating property line
Burnside Twp 45 LA_{Max} at non-participating property line
Shiawassee 45 LA_{Max} at non-participating property line

Other Non-Michigan Jurisdictions

Vermont 38 dBA Leq
New Hampshire 45 LA_{Max} Day or 5 dB over background whichever is greater and 40 LA_{Max} Night or 5 dB over background.
Sweetwater County, Wyoming 40 dBA (LA_{Max}) and 50 dBC (LC_{Max}) (this addresses the low frequency character of wind turbine sounds)

The link below shows a summary of some decibel limits used around the world:
http://wiseenergy.org/Energy/Health/Acoustical_Limit.pdf.

- 2-4) **Refer to the direct testimony of Mr. Richard James, Page 3, lines 101 – 105, and Page 5, lines 158 – 163. If Mr. James recommends a maximum sound level of 35 dBA, and states the setback distance would be on the order of 3600 feet to meet the 35 dBA Leq limit, why does Mr. James calculate the setback to prevent annoyance during nighttime periods from multi-turbine projects would need to be 1.25 miles? Please explain.**

RESPONSE:

Richard James: The 3600-foot setback relates to the goal of limiting wind turbine noise to 35 dBA Leq, a point where annoyance will still occur, but high annoyance is limited to the more sensitive people. The 1.25-mile setback (roughly double the distance and thus about 6 dBA lower in sound level) is the distance needed to prevent high annoyance from audible sounds (infra sound will still be an issue for those sensitive to it). The predicted sound level at 1.25 miles is about 30 dBA Leq. High Annoyance is the descriptor for annoyance that results in health effects and threats of action. (See Health Canada study graph in first statement)

Since rural communities have nighttime sound levels of 25 dBA and often lower the sound of distant wind turbines is still audible even at the 1.25 mile distance.

Also, as revealed in the Health Canada study, the prevalence rates for health effects that are related to pulsating infra and low frequency sound, such as, tinnitus, dizziness, and migraines for people living 1.25 miles from the nearest wind turbine are still double that of the non-exposed population. These sounds may or may not be audible, but still have an impact on sensitive people through non-auditory processes. Thus, we cannot say that 1.25 miles represents a "safe" setback distance for all people.

- 2-5) **Refer to the direct testimony of Mr. Richard James, Page 5, lines 158 – 163, and the Intervenor’s response to Staff Data Request 1-4. The Intervenor recommended a**

condition that requires a 1,500 ft. setback from a property line, but Mr. James recommended a 1.25 mile setback from the property line. Please explain how the 1,500 ft. setback is consistent with Mr. James' testimony.

RESPONSE:

Gregg Hubner: As stated before, I have always advocated for a 2-mile setback from a residence and a 1500 ft. setback from a property or right of way line.

The reason I advocate for 1500 ft. is that people often are near their fence lines, farming, putting up hay or hunting. The Vesta Owners Safety Manual for a 3.0 MW Turbine recommends people to stay 400 meters (1300 ft.) from the turbine unless it is necessary to be closer, and 500 meters away from a runaway turbine (attachment E) This is for a 3.0 MW, and Prevailing Winds is using 3.8 MW turbines. General Electric uses the following calculation for ice throw: 1.5 x hub height plus blade diameter (1.5x (361+449)) = 1,215 foot setback from ROWs and property lines. (Attachment F)

The 2-mile setback for a non-participating resident and a 1500 ft. setback from a property or right of way line would be a good safe combination. It protects both homes and bare land, always considering people are not always in their home, they are across every acre of their land several times during the year.

Reece Almond: Mr. James' explanation for his 1.25-mile setback from a property line is explained on page 6, lines 178-185, of his pre-filed testimony.

**2-6) Refer to the direct testimony of Prof. Mariana Alves-Pereira, Line 460:
"Appropriate zoning laws for industrial wind turbines should be considered."
Please provide Prof. Alves-Pereira recommendation for an appropriate zoning law for industrial wind turbines to address her concerns regarding ILFN.**

RESPONSE:

Mariana Alves-Pereira: I am assuming the question posed above is: "Please request that Prof. Alves-Pereira provide recommendations for an appropriate zoning law for industrial wind turbines to address her concerns regarding ILFN."

Zoning laws were not conceived as legal entities to be solely based on economic convenience. In theory, zoning laws are founded on the idea of the protection of Public Health. In order to properly ascertain what are the 'safe-distances' for residential neighborhoods located in the vicinity of wind developments, then scientifically-valid studies must be undertaken by the appropriate authorities.

The possibility of such studies was briefly described in the subsequent Lines 463-466 of the same testimony:

463 epidemiological studies. Ideally, this would study relevant health endpoints *before* and
464 *after* installation of the industrial wind turbines. It would also include the quantification
465 of ILFN *before* and *after* the installations of the industrial wind turbines, with the same
466 wind speed and wind direction, and evaluated *inside* the affected homes.

There are currently no scientifically-valid studies providing numerical data on ‘safe-distances’ that can effectively protect families against ILFN-contaminated homes (whatever the source).

2-7) Refer to the direct testimony of Prof. Mariana Alves-Pereira, Lines 460 – 462: “However, in the absence of zoning laws based on scientific information, then the governmental agencies responsible for Public Health should step in to conduct appropriately designed epidemiological studies.” Which governmental agency in South Dakota is Prof. Alves-Pereira referring to?

RESPONSE:

Mariana Alves-Pereira: I am unclear as to the question posed here. I understand that the word ‘governmental’ within the context of the State of South Dakota may be misleading. Perhaps, therefore, the word ‘governmental’ should be replaced by ‘federal and state,’:

“[I]n the absence of zoning laws based on scientific information, then *Federal and State agencies responsible for Public Health* should step in to conduct appropriately designed epidemiological studies.”

I am not familiar with the details of South Dakota State Government, but I imagine that there is some Health Department at the State level whose job description would include the protection of Public Health.

At the Federal level, I would imagine that agencies such as the CDC (Center for Disease Control), the ATSDR (Agency for Toxic Substances and Disease Registry) or the NIH (National Institutes of Health) would have the expertise and the mandate to undertake properly designed studies that would begin to ascertain ‘safe-distances’ between residential areas and wind developments.

The lack of properly determined ‘safe-distances’ is not an issue merely in South Dakota, or merely in the United States. Countries all over the world are faced with this quagmire that is leading to the onset of illness among entire families and neighborhoods, and consequently, to increased healthcare costs. Within this context, perhaps the scientific determination of ‘safe-distance’ should be under the auspices of larger regulatory bodies, such as the World Health Organization or the International Standards Organization.

2-8) Refer to the direct testimony of Mr. Jerry Punch, Page 14, lines 396 – 402, and the direct testimony of Mr. Richard James, Page 3, line 101 through Page 4, line 105.

Mr. James recommends that “the maximum sound level for audible sounds should be 35 dBA (Leq) and 50 dBC, especially for nighttime wind turbine noise. We also limited the new noise source to be no more than 5 dBA louder than the pre-operational background sound level at night.”

Mr. Punch recommends that “the WHO recommendation of 40 dBA Leq (night, outside) should not be exceeded at any residence, particularly at non-participating households. To provide adequate protection from sleep disturbance, nighttime noise levels should be limited to 40 dB L_{Amax}. A metric of dB LA10(night, outside), the noise level exceeded 10% during nighttime hours and measured at the façade of the residence, may be a reasonable substitute for L_{Amax} if considered by acoustical experts to be easier to apply for the purpose of compliance.”

The recommendations between these two witnesses for the Intervenors’ appear inconsistent. Actually, Mr. James’ states that the use of a limit of 40 dBA is inadequate to prevent adverse effect (Direct testimony, Page 5, lines 143 – 149).

Will the Intervenors advocate for Mr. James’ recommendation or Mr. Punch’s recommendation for audible noise at the hearing? Please explain.

RESPONSE:

Jerry Punch: The inconsistency of my recommendation with that of Mr. James is in question, and my response is that I stand by my statement that 40 dBA Leq(night, outside) should not be exceeded at any residence, but recognize that others, including Mr. James, may have reasons for recommending a lower level. For example, the WHO (2009)¹ notes that people complain of a sense of reduced well-being at an average noise level of 35 dBA Leq(night, outside), and that same level may be recommended to protect a higher percentage of residents from annoyance, which is known to be a major complaint of individuals living near wind turbines.

In the recent Health Canada study, for example, at least 10% of people in the area of a wind project area who were exposed to levels >35 dBA were extremely annoyed.² I am basing my recommendation to limit averaged nighttime, outside levels to 40 dBA on the WHO’s 2009 recommendation to protect human health. The above-referenced extensive list of levels of noise permitted nationally and internationally³ indicates that levels as low as 30 dBA have been recommended or utilized at a number of wind projects.

In my direct testimony, (page 11, lines 306-307), I stated that “The WHO (2009) Night Guidelines suggest that a 40 dB L_{Amax} level should be the maximum allowable level during nighttime hours.” In fact, the WHO (2009) states that some of the more subtle, physiologically

¹ World Health Organization (2009). Night Noise Guidelines for Europe, p. XIV.

² Michaud, D. S., Feder, K., Keith, S.E., Voicescu, S. A., Marro, L., Than, J., et al. (2016). Exposure to wind turbine noise: Perceptual responses and reported health effects. Journal of the Acoustical Society of America, 139, 1443-1454.

³ http://wiseenergy.org/Energy/Health/Acoustical_Limit.pdf

measurable, aspects of sleep disturbance occur at noise levels of 32-42 dB L_{Amax}(night,inside). According to James,⁴ the L_{Amax} level is 10 dB above that of Leq, so a level of 40 dB L_{Amax} corresponds to a level of 30 dBA Leq; note that is a peak level at night, inside a residence.

My professional opinion is based not only on the concerns expressed in the WHO Night Noise Guidelines for Europe and the WHO Guidelines for Community Noise (Berglund et al., 1999),⁵ but also on the notions that wind turbine noise consists of rapid energy peaks and valleys and that nearby residents need to be protected from inaudible infrasound, as well as audible sound.

The chart below is a graphic illustration of the presence of the highly fluctuant nature of wind turbine noise, over short periods of time. The chart is from Robert Rand, well-known acoustician, and it shows noise fluctuations between about 60 dB SPL to about 72 dB SPL in the one-third octave band centered at 25 Hz. These fluctuations occurred within a time period of only 30 seconds, captured using a fast setting on the sound level meter. The fluctuations occur above and below the average noise level of approximately 67-68 dB Leq(10sec). The chart also illustrates why Leq measurements do not adequately depict the emissions experienced by receptors in real time.

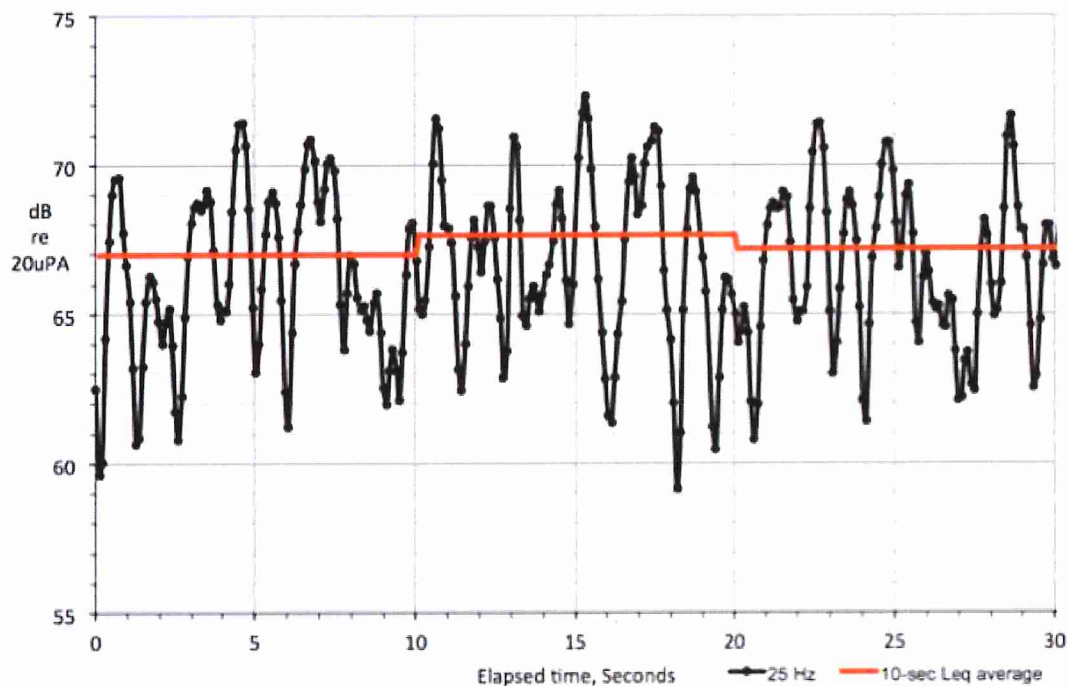


Figure 6.1. 25 Hz one-third octave band noise level, 2000-feet upwind, turbines 2 and 3 operating, Freedom, Maine (acquired 8Jan2010). 1/10 second sample (black), 10-second averages (red). R. Rand

⁴ James, R. (March 27, 2018). Recommended Amendments to Section 4.3.76 Shiawassee County Zoning Ordinance, Article 4, Specific Use Regulations Prepared On Behalf of: Regulated Wind of Shiawassee County (RWSC), p. 6.

⁵ Berglund, B., Lindvall, T., & Schwela, D.H. (eds.) (1999). Guidelines for Community Noise. World Health Organization, April 1999.

With respect to the WHO guidelines, two primary considerations need to be taken into account. Together, they justify the necessity of establishing reasonably conservative noise exposure guidelines with respect to wind turbine noise. First, the WHO bases its recommended noise limits largely on transportation noises, which contain low-frequency energy, but substantially less infrasonic energy than wind turbine noise. Secondly, the WHO assumes that the outside-to-inside attenuation for transportation noises is about 15 dB. Neither of these assumptions can be applied to the infrasonic energy in wind turbine noise, which travels long distances and is not easily attenuated by traditional physical barriers. It is also true that people have a right to sleep with their bedroom windows open, and that should be especially true for those individuals who have chosen to live in an area where they can enjoy the peace and quiet of a rural community.

A case in Vermont⁶ supports the contention that the outside-to inside attenuation of wind turbine noise is much less than 15 dB, and that it is almost negligible, when windows are open. Paul Brouha of Sutton, Vermont, lives 6,385 feet from the nearest turbine in the area of the Sheffield Wind project. Brouha filed his first noise complaint on Dec. 24, 2011, after the wind turbines began operating in October. The Vermont Public Service Board (PSB) dismissed his complaint. An earlier report by the wind project operator showed virtually no reduction (1 dBA) in the broadband sound of the loudspeaker between outdoors and indoors, a value much lower than normally expected, even for large open windows. Brouha hired a noise expert, Acentech, which found that instead of the 15 dB noise attenuation between outside and inside projected by wind project's experts, the home attenuated the noise by 25 dBA when Brouha's bedroom windows were closed, by 9 dBA when the windows were partially open and by only 3 dB when the windows were fully open. The indoor measurements in the Brouha bedroom (averaged across locations within the room) did not exceed the project criterion level of 30 dBA_{Leq}(1hr) with the windows fully closed, but did exceed 30 dBA with the windows partially or fully open.

In the Brouha case, Acentech's measurements showed "multiple and frequent violations of the CPG noise criteria" adopted by the PSB, and the PSB ordered the Vermont Department of Public Service (DPS) to investigate the complaint early in 2014. DPS hired a consultant who conducted the same test on July 1, 2014. In January 2015, Brouha filed a nuisance lawsuit in superior court in Vermont. In September 2015, DPS reported to the PSB that Sheffield Wind exceeded interior noise standards 10 to 14 percent of the time. Because of PSB's laborious investigation and enforcement process, and the parties' noise experts' failure to agree on a new monitoring plan, his noise complaint had not been resolved as of February 2017, the time of the most recent report.

Justification for concern that LAmox be considered as an option (in addition to offering L10 as an option), stems from the following quotes from the 1999 WHO document, as well as the final quote, which is from the 2009 WHO Night Noise Guidelines:

⁶ Smith A, "The Kafkaesque world of windmill neighbors" (VTDigger [The Vermont Journalism Trust] Feb. 3, 2017), available at <<https://vtdigger.org/2017/02/03/annette-smith-kafkaesque-world-windmillneighbors/>>.

- “When the noise consists of a small number of discrete events, the A-weighted maximum level (L_{Amax}) is a better indicator of the disturbance to sleep and other activities.... Where there are no clear reasons for using other measures, it is recommended that L_{Aeq,T} be used to evaluate more-or-less continuous environmental noises. Where the noise is principally composed of a small number of discrete events, the additional use of L_{Amax} or SEL (sound exposure level) is recommended” (p. viii). *(I contend that whether the number of discrete events is small or large, the occurrence of discrete events that have their peak amplitudes during any nighttime period can be highly disturbing to sleep.)*
- “If negative effects on sleep are to be avoided the equivalent sound pressure level should not exceed 30 dBA indoors for continuous noise. If the noise is not continuous, sleep disturbance correlates best with L_{Amax} and effects have been observed at 45 dB or less. This is particularly true if the background level is low.” (p. 46)
- “When the background noise is low, noise exceeding 45 dB L_{Amax} should be limited, if possible, and for sensitive persons an even lower limit is preferred. Noise mitigation targeted to the first part of the night is believed to be an effective means for helping people fall asleep. It should be noted that the adverse effect of noise partly depends on the nature of the source. A special situation is for newborns in incubators, for which the noise can cause sleep disturbance and other health effects (p. xii).... The L_{Amax} of sound events during the night should not exceed 40 dB(A) indoors. For ward rooms in hospitals, the guideline values indoors are 30dB L_{Aeq}, together with 40 dB L_{Amax} during night.” (p. xiii)
- “L₁₀ values have been widely used to measure road-traffic noise, but they are usually found to be highly correlated measures of the individual events, as are L_{Amax} and SEL.” (p. 23)
- “Where the noise consists of a small number of discrete events, the A-weighted maximum level (L_{Amax}) will be a better indicator of the disturbance to sleep and other activities.” (p. 29)
- “A large number of events lead to high levels of awakening once the threshold of L_{Amax,inside} is exceeded.” (p. 105)

Richard James: As I explained in my response to question 2-3) picking a regulatory limit should focus on the characteristic of the noise emitter that is most problematic. As Dr. Punch explains above the differences between our recommendations are mainly a result of which metric we are considering for limiting the intrusion. There are many different ways that limits can be set with the 35 dBA L_{eq} or 45 dBA L_{Max} being two examples. Any differences between Dr. Punch's suggestions and mine are likely resolved when considering these various options for metrics.

I support Dr. Punch's response.

2-9) Refer to the direct testimony of Mr. Jerry Punch, Page 11, lines 303 – 314. Have any U.S. counties or states adopted the Intervenor’s recommended maximum nighttime noise level regulation for wind energy facilities of 40 dB LA max? Please provide documentation to support the response.

RESPONSE:

Jerry Punch: In answer to the staff’s Question 2-9, it is understandable that few if any U.S. counties or states have adopted 40 L_{Amax}, or the L_{Amax} metric in general, as a means of quantifying maximum nighttime noise. L_{Amax} has been discussed, however, as a recommended metric at some wind projects, but there is scant evidence that 40 dB L_{Amax} has been adopted at any specific facility. I can point, though, to several communities where the concept of L_{Amax} (sometimes referred to as L_{max}) has been recommended as a legitimate metric for measuring the level of wind turbine noise, or where the refusal of a wind company to adopt L_{max} was a partial basis for disapproval of a wind project.

According to Robert Chanaud,⁷ who recently developed a document that serves as an update of the EPA’s Model Community Noise Control Ordinance, the Leq metric is part of the noise ordinances in Seattle, Washington, and Portland, Oregon. The Seattle ordinance stipulates that “...the L_{max} must not be more than 15 dB over the Leq” (p. A-17). The same document states: “Set the maximum levels sufficiently high that it is unlikely for the ambient to exceed it. This approach requires either an arbitrary assumption or extensive measurements. It also does not satisfy the health and welfare goals of the community so no communities have taken it” (p. 6-3).

In Almer Township, Michigan, the local ordinance specified a noise limit of 45 dBA. The presiding judge interpreted the ordinance to mean that no sound should be allowed to exceed 45 dBA, and ruled that Tuscola Wind’s refusal to adopt L_{max} as a means to comply with the ordinance was tantamount to its refusal to protect citizens from fluctuating wind turbine noise. In his final ruling, the judge stated: “...it is ORDERED that Defendant Almer Township Board’s denial of Plaintiff Tuscola Wind III, LLC’s, SLUP application is AFFIRMED” (p. 46). In footnote 12 of that document (p. 45), it is stated: “Tuscola has not demonstrated that it is entitled to deferential or economically favorable conditions. Perhaps application of an L_{max} standard creates such an economic hardship that it constitutes de facto exclusionary zoning. But Tuscola’s conclusory briefing on this point falls far short of showing that to be true.”

Despite the low prevalence of the adoption of L_{Amax} as a preferred metric in local zoning ordinances, the use of L_{Amax} deserves to be explored by wind developers, as it offers an increased probability that the numerous complaints of annoyance and adverse effects related to wind turbine noise exposure can be substantially reduced.

In my direct testimony, I provided several alternative metrics as recommendations for determining the maximum allowable limits for wind turbine noise emissions. I have offered the above detailed explanation of my justification for including both an Leq level and L_{Amax} level


⁷ Chanaud, R. C. (July 2014). Noise ordinances: Tools for enactment, modification and enforcement of a community noise ordinance.

because of a specific question raised regarding inconsistency between my recommendation and that of Mr. James.

Having given my rationale for recommending 40 dB LAmax as one such metric, it is the case that the use of LAmax could entail some rather complex measurement issues. It would be a relatively simple matter to determine whether a specific LAmax level has been exceeded in a given nighttime period of time, such as an 8-9 hour night, or nights over a one-week period. However, a decision would have to be made regarding how many discrete occurrences of that maximum level are allowable before the noise is ruled in noncompliance. While the WHO (2009, p. XV) states that a large number of events lead to high levels of awakening once the LAmax threshold is exceeded, it also indicates that there is no generally accepted way to count the number of relevant noise events, and that the options include the number of measured LAmax levels and the number exceeding a specific LAmax level (p. 8). For this reason, it is understandable that most wind projects have adopted the use of dBA Leq, which—despite its extreme limitations when applied to wind turbine noise—is a traditional metric around which there is a considerable body of data for comparison. Although resolution of these issues could be achieved with careful thought, it would require an effort the wind industry thus far has not been willing to expend.

Dated this 2nd day of October, 2018.

DAVENPORT, EVANS, HURWITZ &
SMITH, L.L.P.

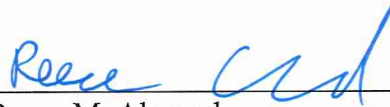

Reece M. Almond
206 West 14th Street
P.O. Box 1030

Sioux Falls, SD 57101-1030

Telephone: (605) 336-2880

Facsimile: (605) 335-3639

E-mail: ralmond@dehs.com

*Attorneys for Intervenors Gregg Hubner,
Marsha Hubner, Paul Schoenfelder and
Lisa Schoenfelder*

CERTIFICATE OF SERVICE

The undersigned, one of the attorneys for Intervenor Gregg C. Hubner, Marsha Hubner, Paul M. Schoenfelder, and Lisa A. Schoenfelder, certifies that a true and correct copy of the **Intervenor's Responses to Staff's Second Set of Data Requests to Intervenor** was served on October 2^d, 2018, via email, upon the following:

Kristen Edwards
kristen.edwards@state.sd.us
Amanda Reiss
Amanda.Reiss@state.sd.us
Staff Attorneys
South Dakota Public Utilities Commission
500 E. Capitol Ave.
Pierre, SD 57501

Mollie M. Smith
msmith@fredlaw.com
Lisa M. Agrimonti
lagrimonti@fredlaw.com
Fredrikson & Byron, P.A.
200 South Sixth St., Ste. 4000
Minneapolis, MN 55402
Attorneys for Applicant

Dated this 2^d day of October, 2018.



Reece M. Almond
206 West 14th Street
P.O. Box 1030
Sioux Falls, SD 57101-1030
Telephone: (605) 336-2880
Facsimile: (605) 335-3639
E-mail: ralmond@dehs.com
Attorneys for Intervenor

**BEFORE THE PUBLIC UTILITIES COMMISSION
OF THE STATE OF SOUTH DAKOTA**

**EL18-026 - IN THE MATTER OF THE
APPLICATION BY PREVAILING
WIND PARK, LLC FOR A PERMIT OF
A WIND ENERGY FACILITY IN BON
HOMME COUNTY, CHARLES MIX
COUNTY AND HUTCHINSON
COUNTY, SOUTH DAKOTA, FOR THE
PREVAILING WIND PARK PROJECT**

*
*
*
*
*
*
*
*

**APPLICANT’S RESPONSES TO
STAFF’S FIFTH SET OF DATA
REQUESTS**

EL18-026

Below, please find Applicant’s Responses to Staff’s Fifth Set of Data Requests to Applicant.

- 5-1) Refer to the direct testimony of Mr. Richard James, Page 10, line 342 through Page 11, line 353:

“Second, I reviewed the information on the computer model prepared for the report. I find the model is deficient in many ways. One significant way is that it fails to include two important sets of tolerances. The sound power data used as input to the model is derived using a method that has about a ± 2 dB tolerance for measurement repeatability. This tolerance should have been added to the sound power levels used as input to the model to account for known variability in measurement data. Also, the model uses the formulas and protocols from ISO 9613-2 which states it is not applicable for noise sources that are more than 30 meters above 350 the ground or receiver elevation. Even if the model was appropriate for wind turbine noise the model has known tolerances of ± 3 dBA. This should have also been applied as an adjustment to the Burns-McDonnell sound model. Given these two tolerances the predicted sound levels are as much as 5 dBA low.”

- a) Please respond to Mr. James’ comment regarding a 2 dBA tolerance for measurement repeatability and explain how the Applicant incorporated the tolerance in the sound model.

Chris Howell: The vendor data used in our modeling is developed per IEC 61400-11 and reflects the loudest sound levels the turbines are expected to produce at any given time. Further, the model assumes all turbines are operating at maximum sound levels at all times in all directions. A residence between two turbines is assumed to experience downwind sound from both turbines (which is a physical impossibility). In general, the plus or minus (+/-) 2-dBA tolerance referenced by Mr. James captures

unexpected situations. It is worth noting that the situations captured by +/- 2-dBA are as likely to be over-predicted by up to 2 dBA as they are to be under-predicted by 2 dBA. In our experience, our model predicts the most likely outcome for loudest impacts. We have developed and refined our modeling techniques using actual measurement data as a basis for comparison, and our modeling has proven accurate through the years when compared to post-construction measurements. Therefore, the model predicts the most likely loudest sound levels for the Project, and adding or subtracting 2 dB would be less accurate.

- b) Please respond to Mr. James' comment regarding a 3 dBA tolerance from the formulas and protocols from ISO 9613-2 and explain how the Applicant incorporated the tolerance in the sound model.

Chris Howell: ISO 9613-2 includes language for tolerance; we did not include this tolerance in our modeling. As previously stated, we approached the modeling using conservative assumptions, and the model predicts the most likely loudest sound levels. The accuracy of our modeling has been confirmed by comparing our pre-construction modeling to post-construction sound measurements. There is no reason to apply overly conservative assumptions to the modeling, as doing so would result in a less accurate prediction of the Project's projected loudest sound levels.

- c) Is the predictive sound levels reflected in the model as much as 5BA low? Please explain.

Chris Howell: No. We are confident that our modeling results are not under-predicting by 5-dBA. It would not be prudent to under-predict potential sound levels in a regulatory setting, so we use conservative inputs. That said, we do not always use the most conservative selections because it is also important to be accurate, and we have to weigh the compounding effects of always making conservative choices in a model. Doing so could result in very unrealistic predictions, which, as noted previously, are not helpful to clients or regulators because they do not present an accurate picture of the Project's projected loudest sound levels. As noted previously, our modeling techniques use actual measurement data as a basis for comparison, and our modeling method has proven to be accurate through the years for other projects.

- 5-2) Refer to the direct testimony of Mr. Richard James, Page 11, lines 354 through 359:

“Further, the values used for ground attenuation are not disclosed. The proper value for ground attenuation is “0” to turn off any calculations of ground effect. This is because the height of the wind turbines means that the sound emitted by them radiates directly from the blades to the homes without interaction with the ground. The ISO ground attenuation calculations are intended for ground-based

noise sources where the sound radiates along a line from source to receiver just above the ground.”

Please respond to Mr. James’ comment regarding the values for ground attenuation reflected in the sound model.

Chris Howell: Mr. James continues to advocate for overly conservative methods that would not accurately predict the Project’s sound levels. Specifically, using “0” is overly conservative in these circumstances because it is representative of “hard ground,” (i.e. paving, ice, concrete). However, the Project area is predominantly agricultural in nature, which according to ISO 9613-2 is considered “porous ground.” ISO 9613-2 suggests a ground absorption value of 1.0 for “porous ground.” However, a ground absorption factor of 0.5 was conservatively used within the model to simulate mixed ground (equally hard and porous).

According to ISO 9613-2, the ground absorption plays a role in three distinct areas: the source; middle; and receiver. While the source and middle are elevated, the receiver area is near-grade and will be influenced by the ground absorption. The influence of ground absorption due to elevation of the source and receiver, and therefore the middle area, are automatically determined within the model. Again, assuming 0 for ground absorption near the receiver is considered overly conservative and would not present an accurate picture of the Project’s projected sound levels.

- 5-3) Is compliance with the Bon Homme County’s noise regulation associated with wind energy systems achieved through a sound model based on predicted sound levels, or is compliance based on actual sound levels? Please explain.

Lisa Agrimonti: Section 1741 of the Bon Homme County Ordinance states: “Noise level produced by the LWES shall not exceed forty five (45) dBA, average A-weighted sound pressure at the perimeter of occupied residences existing at the time the permit application is filed, unless a signed waiver or casement is obtained from the owner of the residence. The permittees shall submit a report of predicted noise levels at habitable residential dwellings within one mile of proposed tower locations to the Board no less than forty five (45) days prior to commencing construction.”

Compliance with this provision requires, prior to construction, submission of a report showing that modeled sound levels will meet the stated limit. In operations, the Ordinance requires that actual noise levels from the wind farm not exceed the stated limit.

- 5-4) Refer to the direct testimony of Mr. Richard James, Page 11, line 381 through Page 12, 388:

“Before any decisions are made on permitting this project the applicant should be required to submit a new model that applies the known tolerances to the input data. It should also show the contour lines for 30, 35, and 40 dBA. These new sound levels should then be viewed as indicators of what the community will experience on a day when the wind turbines are operating under optimum conditions for the lowest noise emissions. They are not precision predictions. Review of the model should be done keeping in mind that the operating values can be as much as 10 dB higher than what is predicted, under operating conditions that would be considered normal.”

- a) Please comment on Mr. James’ request above.

Chris Howell: Published noise emissions by the wind turbine vendor indicate that the turbines will vary by 10 to 15 dBA. The loudest published sound levels were used within our modeling. I am confident in our modeling, for the reasons discussed above, and do not believe additional modeling is necessary or helpful.

- b) Please submit a map that shows the contour lines for 30, 35, and 40 dBA using the sound model results that the Applicant believes accurately reflects predictive sound levels.

Chris Howell: See Attachment 5-4

- 5-5) Refer to the direct testimony of Mr. Richard James, Page 6, line 174 through 206. Does the Applicant agree or disagree that noise limits should be applied to the property lines or to the homes? Please explain.

Chris Howell: The noise modeling conducted for the Project was modeled at residences in accordance with general practice and requirements. *See, e.g., Bon Homme County Ordinance, Section 1741 (setting sound standard “at the perimeter of occupied residences” not the property line).*

- 5-6) Refer to the direct testimony of Prof. Mariana Alves-Pereira, Page 27, lines 461 – 466:

However, in the absence of zoning laws based on scientific information, then the governmental agencies responsible for Public Health should step in to conduct appropriately designed epidemiological studies. Ideally, this would study relevant health endpoints before and after installation of the industrial wind turbines. It would also include the quantification of ILFN before and after the installations of the industrial wind turbines, with the same wind speed and wind direction, and evaluated inside the affected homes.

What is the Applicant's position on the Intervenor's request for an epidemiological study by the governmental agencies responsible for Public Health? Please explain.

Dr. Mark Roberts: Referring to my Supplemental Direct and Rebuttal Testimony, multiple state, federal, and international governmental bodies have independently reviewed the peer-reviewed, published literature many times over and have reached similar conclusions that there is no evidence of wind turbines being associated with a specific health effect. (Massachusetts (2012), Germany (2016), Japan (2017), France (2017), Denmark (2009), Switzerland (2017), New Zealand (2010), and Australia (2015).) With respect to Dr. Alves-Pereira's call for more study, science is an evolving knowledge base that will be influenced by discussions of societal change (climate change, alternate energy sources, medical treatments) and demands of life, but decisions are made based on the science that we know. The science related to wind turbines has been assessed multiple times by multiple groups of scientists, and they have all come to the similar conclusion – there is no specific health effect associated with sounds produced by wind turbines. As I have pointed out in my testimony, science evolves, and with it comes new knowledge. In this area, there has been no scientifically verifiable evidence that wind turbines are associated with a specific health effect.

5-7) Refer to the direct testimony of Mr. Jerry Punch, Page 11, lines 303 – 314.

a) Does the Applicant agree that LA_{max} is the optimal measurement metric to protect sleep? Please explain.

Chris Howell: This metric is intended to quantify sound levels from instantaneous and non-continuous noise sources, such as dogs barking, thunder, car passing by, etc., that occur during an otherwise quiet time period. As such, it may be a useful metric to gauge if a person is likely to wake from one of these sources. The WHO Night Noise Guidelines for Europe state that LA_{max} is intended for non-continuous sources of sound and would therefore not be relevant to sounds emitted from wind turbines.

b) Based on the WHO Night Guidelines, is a 40 dB LA_{max} level a reasonable maximum allowable noise level during nighttime? Please explain.

Chris Howell: No, this is not a reasonable maximum level, and it is not the recommended limit from the WHO Night Noise Guidelines. The WHO Night Noise Guidelines recommend a L_{night}, outdoor level of 40 dBA. This is an average sound level during all nighttime hours (8-hour period) over each night of an entire year and is inclusive of any sounds that may occur. In the case of a wind farm, the metric also incorporates time periods when sounds levels don't include the source of interest (e.g., when the turbines are not operating). Bon Homme County's limit of 45 dBA

would apply on any given night, not be averaged out over an entire year, and would differentiate wind turbine noise from other intrusive noises.

Dated this 5th day of October, 2018.

By: /s/ Lisa M. Agrimonti

Mollie M. Smith

Lisa M. Agrimonti

FREDRIKSON & BYRON, P.A.



Attorneys for Applicant

200 South Sixth Street, Suite 4000

Minneapolis, MN 55402

Phone: (612) 492-7270

Fax: (612) 492-7077

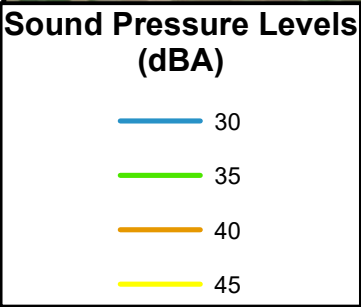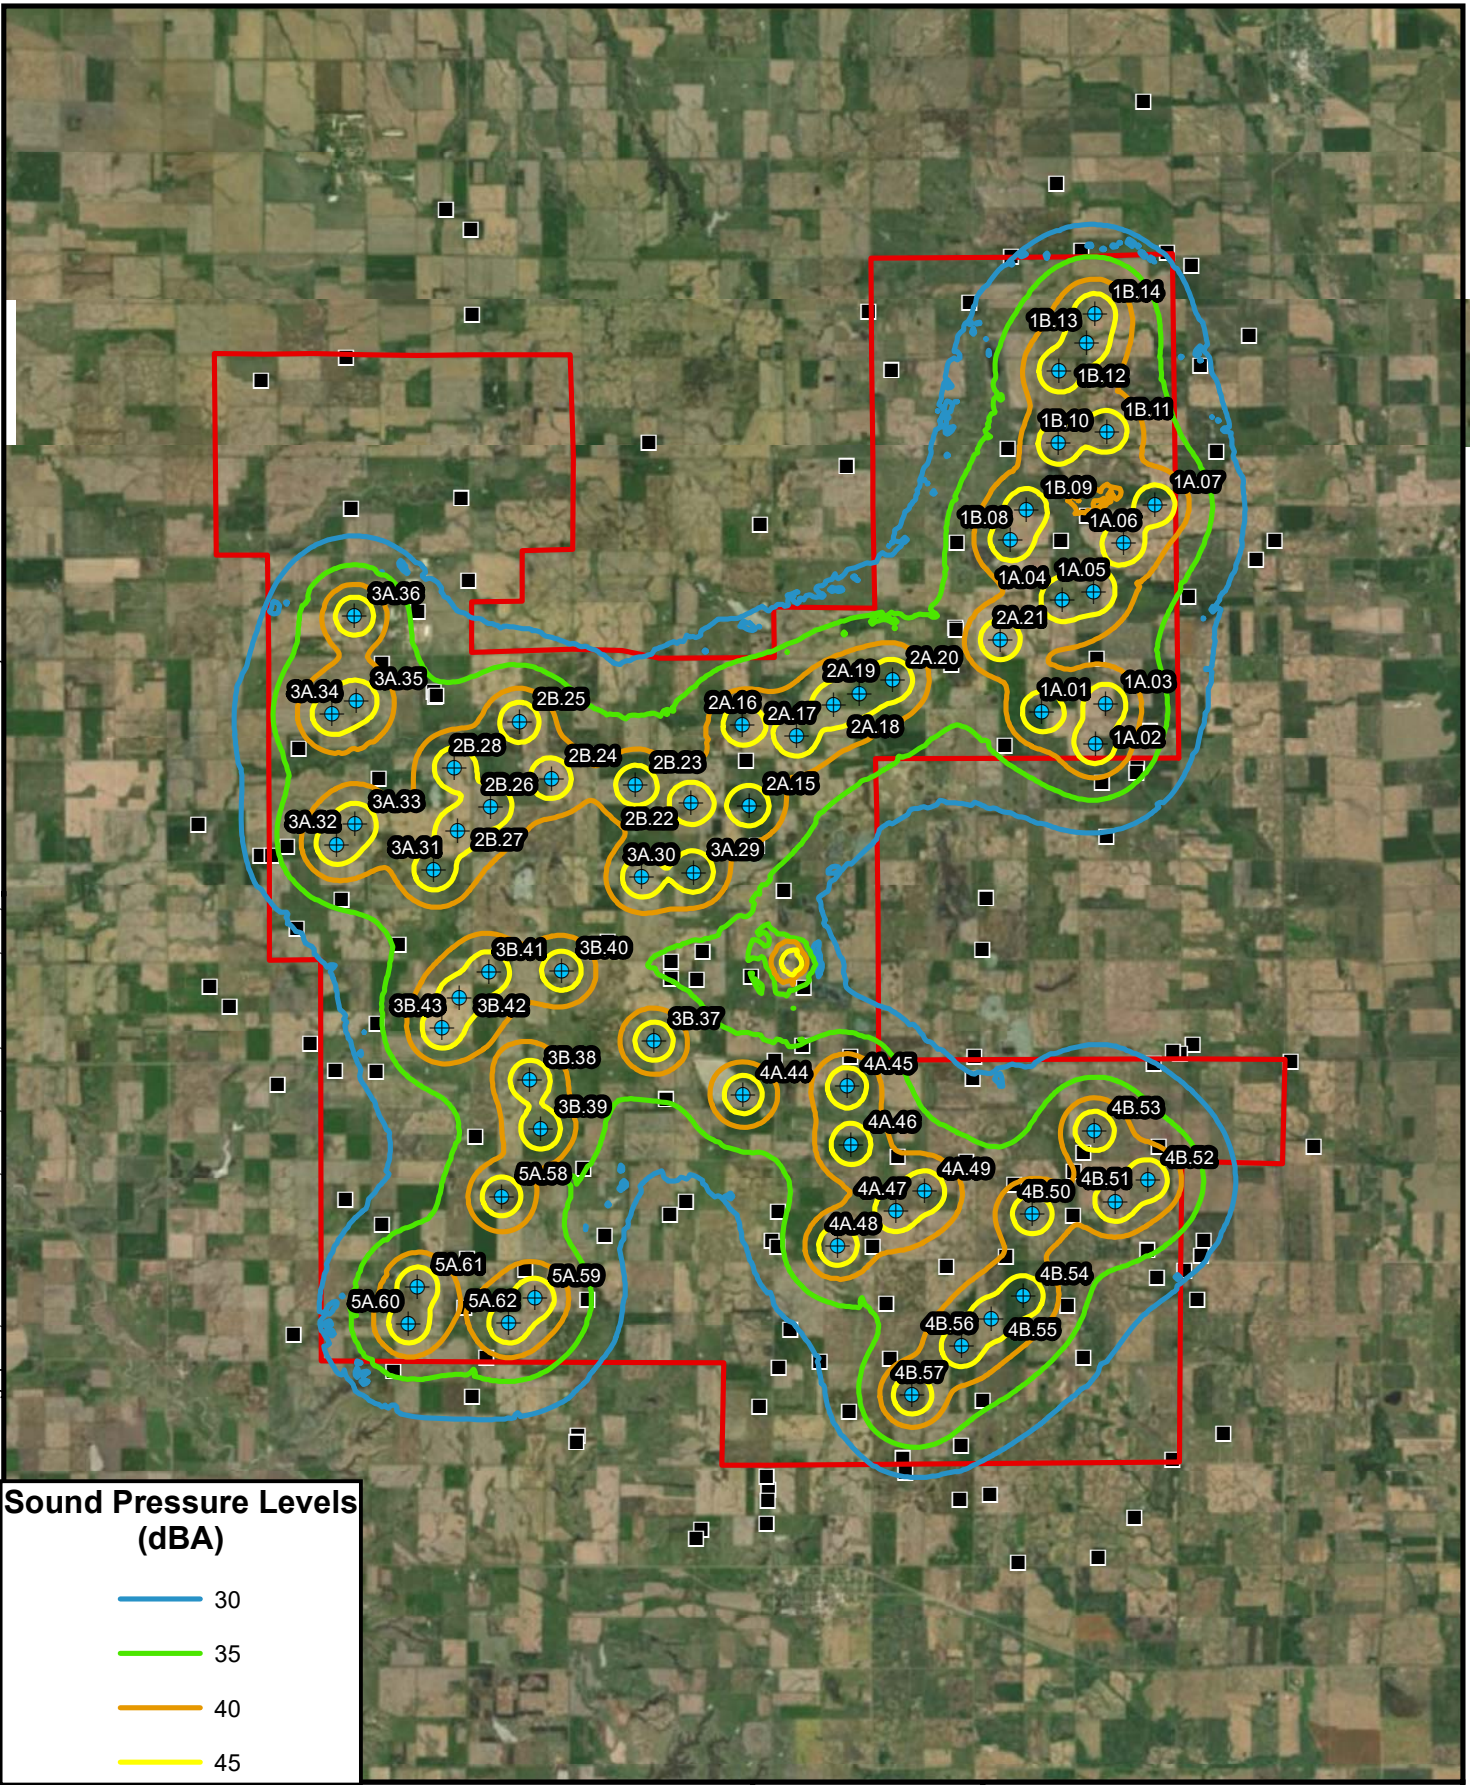

- ⊕ Turbine Location
- Occupied Residence
- Project Area

0 5,000 10,000

Scale in Feet



Figure D-1
 Prevailing Wind Park
 Sound Level Contours
 22 of 27

**BEFORE THE PUBLIC UTILITIES COMMISSION
OF THE STATE OF SOUTH DAKOTA**

**IN THE MATTER OF THE
APPLICATION BY PREVAILING
WIND PARK, LLC FOR A PERMIT OF
A WIND ENERGY FACILITY IN BON
HOMME COUNTY, CHARLES MIX
COUNTY AND HUTCHINSON
COUNTY, SOUTH DAKOTA, FOR
THE PREVAILING WIND PARK
PROJECT**

*
*
*
*
*
*
*
*
*

**APPLICANT’S RESPONSES TO
STAFF’S SIXTH SET OF DATA
REQUESTS
EL 18-026**

Below, please find Applicant’s Responses to Staff’s Sixth Set of Data Requests to Applicant.

- 6-1) Refer to the Application, Page 15-14. Please provide all studies and supporting documentation that show a shadow flicker requirement of less than 30 minutes per day or 30 hours per year will avoid a significant adverse impact on neighboring land uses and a significant adverse impact on health.**

Peter Pawlowski: Based on the studies and documentation addressed in testimony by Prevailing Wind Park, a shadow flicker requirement of less than 30 minutes per day or 30 hours per year is not necessary to avoid adverse impacts on land use or health. See, e.g., the testimony submitted by Aaron Anderson and Dr. Mark Roberts. In addition, the Project will comply with all applicable shadow flicker requirements and commitments.

- 6-2) Refer to the Applicant’s Disclosure of Lay Witnesses, which identifies Karen Peters and Dustin Brandt as participating landowners that will testify at the hearing. For each individual testifying, please provide the following information:**

- a) How many acres of land does the landowner have in the project?**

Bridget Canty: Prevailing Wind Park has a lease with Larry Peters and Karen Peters Living Trust, Larry Peters, Trustee, and Karen Peters, Trustee, Husband and Wife, with respect to 260 acres. Prevailing Wind Park has a lease with Dustin Brandt and Elizabeth Brandt with respect to 60 acres.

- b) Provide a map which identifies each landowners’ leased land within the project area, including where the turbines, if any, are sited on their land.**

Bridget Canty: See attachment 6-2b.

- c) Provide a map that shows the proposed turbines within 2 miles from their residence. Please provide a map similar to Page 88 of 156 of Staff Exhibit_JT-1**

in Docket EL18-003 for Ms. Teresa Kaaz
(<http://puc.sd.gov/commission/dockets/electric/2018/EL18-003/exhibits/staff/s1.pdf>).

Bridget Canty: See Attachment 6-2c.

d) Provide the predicted sound level from the Project at their residence.

Chris Howell:

| Receptor | Sound Power Level |
|------------------|-------------------|
| REC-016 (Peters) | 38.9 dBA |
| REC-051 (Brandt) | 32.7 dBA |

e) Provide the estimated annual frequency of shadow flicker associated with the operation of the Project wind turbines at their residence.

Aaron Anderson:

| Receptor | Flicker, Hours | Flicker, Minutes |
|------------------|-------------------|------------------|
| REC-016 (Peters) | 4.78 hours / year | 27 minutes/day |
| REC-051 (Brandt) | 4.90 hours / year | 26 minutes/day |

6-3) Please provide a study, with calculations included, signed by a professional engineer that demonstrates ice throw will not occur beyond 620 feet.



Lisa Agrimonti: Prevailing Wind Park does not possess such a study. In lieu thereof, see the Rebuttal Testimony of Scott Creech.

Dated this 5th day of October, 2018.

By: /s/ Lisa M. Agrimonti

Mollie M. Smith
Lisa M. Agrimonti
FREDRIKSON & BYRON, P.A.
Attorneys for Applicant
200 South Sixth Street, Suite 4000
Minneapolis, MN 55402
Phone: (612) 492-7000
Fax: (612) 492-7077

64944538.1

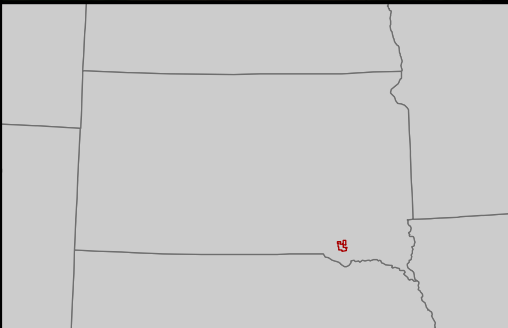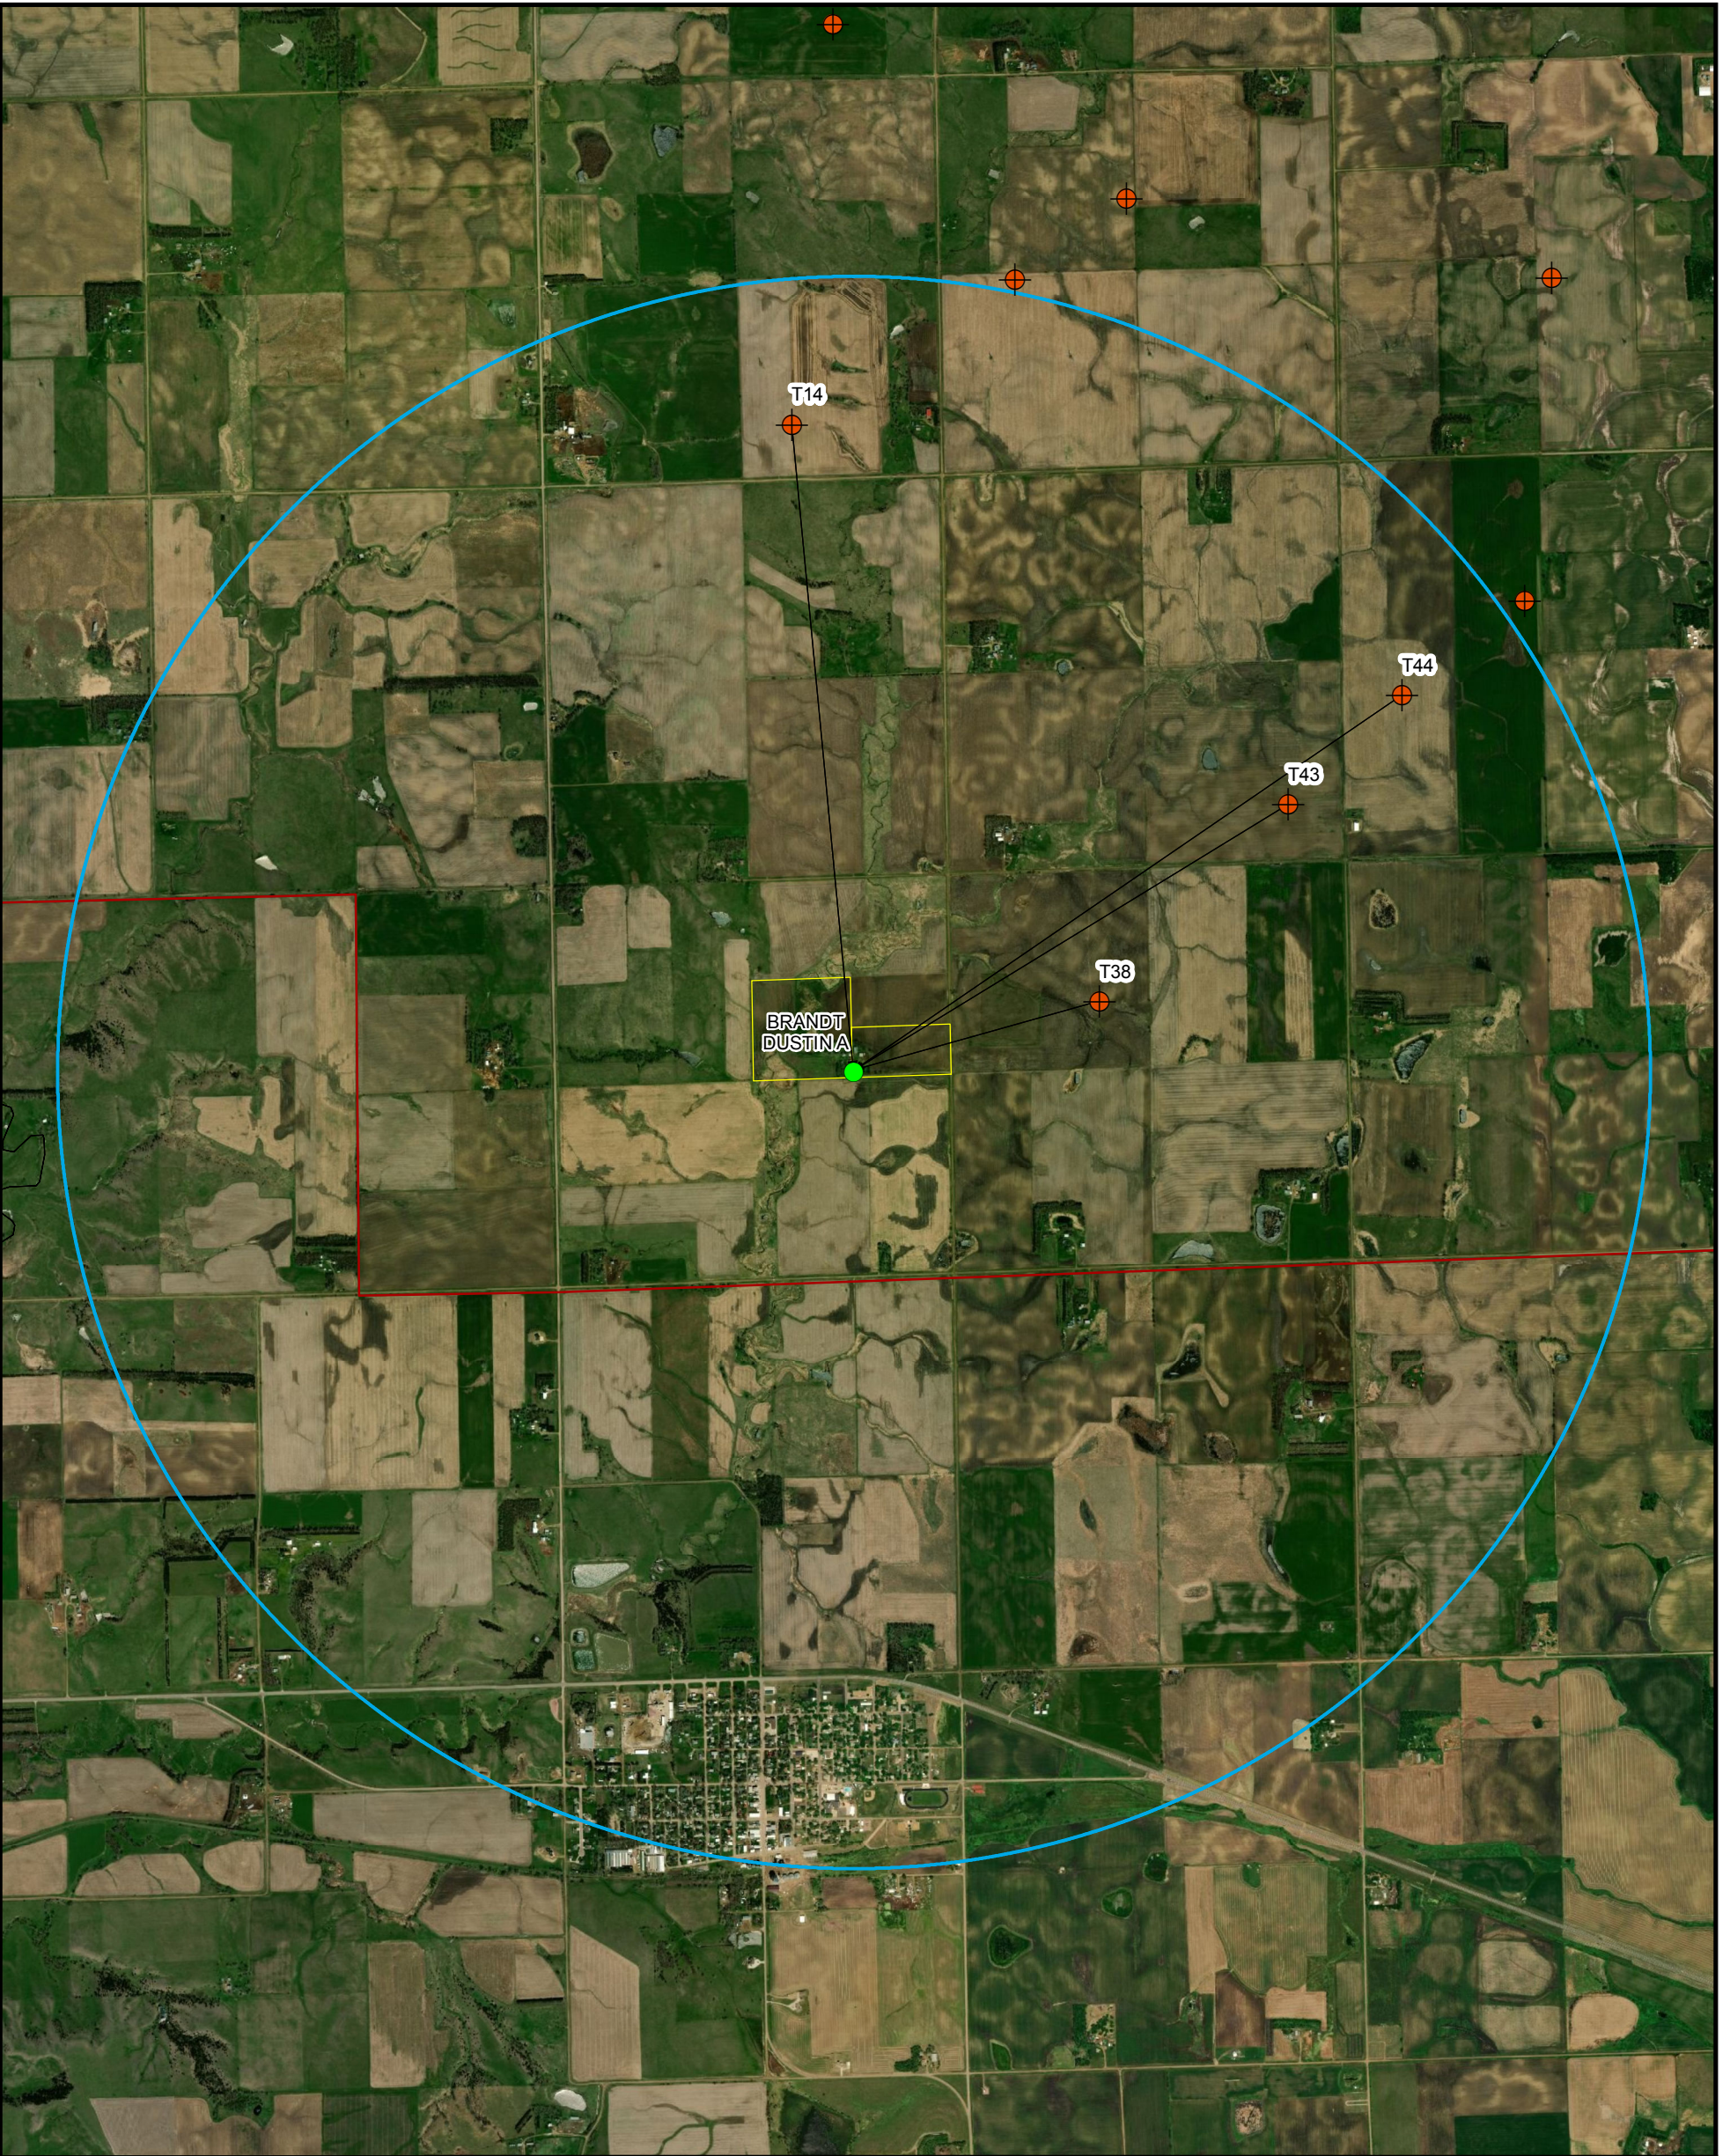

Turbine Distance to Residence

| Turbine | Length Miles | Length Feet |
|---------|--------------|-------------|
| T38 | 0.64 | 3364 |
| T43 | 1.28 | 6738 |
| T14 | 1.63 | 8590 |
| T44 | 1.67 | 8795 |

● Residence 2 Mile Buffer
● Proposed Turbine Parcels
→ Distance Lines Project Area


NORTH

0 0.5 1
Miles

**BURNS
MCDONNELL**

**Residence & Property of
Dustin A. Brandt
30049 407th Avenue
Bon Homme County
South Dakota**

26 of 27

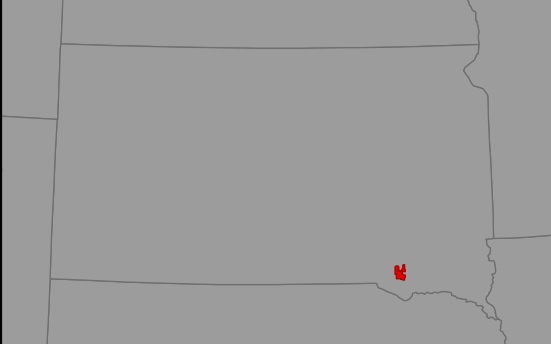

**Residence and Property of
 Larry & Karen Peters
 29416 402nd Avenue
 Charles Mix County
 South Dakota**

Turbine Distance to Residence

| Turbine | Length Miles | Length Feet |
|---------|--------------|-------------|
| T57 | 0.5 | 2658 |
| T16 | 0.75 | 3948 |
| T48 | 0.77 | 4050 |
| T40 | 0.78 | 4106 |
| T32 | 0.78 | 4138 |
| T22 | 0.93 | 4909 |
| T23 | 1.05 | 5556 |
| T15 | 1.13 | 5969 |
| T8 | 1.49 | 7869 |
| T26 | 1.61 | 8513 |
| T9 | 1.7 | 8955 |

Residence
 Turbine
 Distance Line
 2 Mile Radius
 Parcels
 County Boundary

