

**BEFORE THE PUBLIC UTILITIES COMMISSION
OF THE STATE OF SOUTH DAKOTA**

**IN THE MATTER OF THE APPLICATION OF
CROWNED RIDGE, LLC FOR A FACILITIES PERMIT TO
CONSTRUCT A 300 MEGAWATT WIND FACILITY**

Docket No. EL19-

**DIRECT TESTIMONY
OF MARK THOMPSON**

January 29, 2019

INTRODUCTION AND QUALIFICATIONS

Q. PLEASE STATE YOUR NAME AND BUSINESS ADDRESS.

A. Mark Thompson, 700 Universe Blvd., Juno Beach FL 33408.

Q. WHAT IS YOUR JOB AND WHAT ARE YOUR JOB RESPONSIBILITIES?

A. I am the Manager of Wind Engineering within the Engineering & Construction (“E&C”) organization at NextEra Energy Resources, LLC (“NEER”). As the Manager of Wind Engineering, one of my primary roles is to coordinate or provide support for the development of new wind sites that include underground collector systems, substations, and transmission lines. I also provide support in permit acquisition, system engineering, specification and standards development, material and services procurement, construction management, commissioning, system integration, compliance, and project close-out in heavily regulated, environmentally-sensitive, and multi-system operational environments.

Q. WHAT IS THE ORGANIZATIONAL RELATIONSHIP BETWEEN NEER AND CROWDED RIDGE WIND, LLC?

A. Crowned Ridge Wind, LLC (“CRW”) is an indirect, wholly-owned subsidiary of NEER.

Q. PLEASE DESCRIBE YOUR BACKGROUND AND QUALIFICATIONS

A. I have over 17 years of experience in design, engineering, permitting, project management, and construction at both Florida Power & Light Company and NEER, including wind plants and their associated facilities. I hold a Bachelor of Science Degree in Electrical Engineering from the University of Technology, Jamaica in 1996 and a

1 Master's in Business Administration Degree from Nova Southeastern University in
2 Florida in 1999.

3
4 **Q. HAS THIS TESTIMONY BEEN PREPARED BY YOU OR UNDER YOUR**
5 **DIRECT SUPERVISION?**

6 A. Yes.

7
8 **Q. HAVE YOU PREVIOUSLY TESTIFIED BEFORE THE SOUTH DAKOTA**
9 **PUBLIC UTILITIES COMMISSION?**

10 A. Yes, I submitted testimony in Docket EL18-019 related to Crowned Ridge Wind II's
11 request for a facility permit for a transmission line.

12
13 **PURPOSE OF TESTIMONY**

14 **Q. PLEASE DESCRIBE THE PURPOSE OF YOUR TESTIMONY.**

15 A. The purpose of my testimony is address the design, construction, operation and
16 maintenance ("O&M"), and decommissioning of the proposed Crowned Ridge Wind
17 ("CRW") Facility ("Wind Facility" or "Project").

18
19 **DESIGN AND CONSTRUCTION**

20 **Q. PLEASE DESCRIBE THE TECHNICAL DESIGN SPECIFICATIONS OF THE**
21 **WIND TURBINES.**

22 A. The Crowned Ridge Wind Farm would consist of 130 three bladed, horizontal-axis wind
23 turbines. The Project will primarily utilize GE 2.3MW turbines with 116-meter (381-feet)

1 rotor diameter and 90-meter (295-feet) hub height. GE 2.3MW turbines with 116-meter
2 (381-feet) rotor diameter and an 80- meter (262-feet) hub height will also be utilized in
3 select locations.

4
5 The tubular towers proposed for the Project are conical steel structures and consist of 3
6 tubular steel sections with bolted connections. A steel door at the base of the tower
7 provides secure access. An internal ladder with fall protection, which is connected to the
8 steel wall of the tower, provides access to the top of the tower. The turbines will be
9 grounded in accordance with National Electrical Safety Code (“NESC”) standards and
10 comply with all Federal Aviation Administration (“FAA”) requirements. The towers
11 will be painted off-white to minimize visual impact.

12
13 The main mechanical and electrical components of the wind turbine are housed in the
14 nacelle. The nacelle is mounted on a sliding ring that allows it to rotate, or “yaw,” into
15 the wind. The nacelle components include the drive train, gearbox, and generator. The
16 nacelle is housed in a steel-reinforced fiberglass shell that protects internal machinery
17 from the environment. The housing is designed to allow for adequate ventilation to cool
18 internal machinery. The nacelle is externally equipped with an anemometer and a wind
19 vane to measure wind speed and direction. The generated electricity is conducted through
20 cables within the tower to the down tower assembly mounted at the base of the turbine
21 tower. A rotor assembly is mounted on the drive shaft and operates upwind of the tower.
22 Also, electric motors within the rotor hub vary the pitch of each blade according to wind
23 conditions to maximize turbine efficiency at varying wind speeds.

1 **Q. PLEASE DESCRIBE HOW THE TURBINES WILL BE CONSTRUCTED.**

2 **A.** The wind turbines will be constructed at a location that meets both permit and geological
3 subsurface requirements. These locations are documented on a site plan with permitted
4 access roads and crane path that would provide access during construction. At the
5 foundation location, topsoil would be stripped and stockpiled for reclamation. The
6 foundation is designed based on the physical attributes of the turbine tower (height and
7 weight) and the geological characteristics of the soil below the ground. Equipment is used
8 to excavate an 8 feet deep by 50 feet wide depression to facilitate the rebar cage, anchor
9 bolts, and concrete for the foundation. The concrete is transported from either an on-site
10 or off-site batch plant and poured over the nested rebar within the form. After the
11 concrete has been cured, the native soil is used to back fill/cover up the majority of the
12 foundation, leaving a one foot reveal known as pedestal, which will accommodate the
13 turbine tower. The base section of the tower is affixed to the pedestal with anchor bolts.
14 The mid and top sections are then sequentially connected with bolted flanges. The
15 remaining excavated soil will be used to construct a pad to facilitate set up for the crane
16 needed to raise tower sections, rotor, blades, and nacelle.

17
18 **Q. PLEASE EXPLAIN WHAT REMEDIAL ACTIVITIES WILL OCCUR AFTER**
19 **CONSTRUCTION.**

20 **A.** After construction is concluded, crane paths and construction access roads are reclaimed
21 to a width of approximately 16 feet to accommodate O&M activities. A post
22 construction erosion plan is implemented to prevent site degradation due to water runoff.
23 All wind turbine service roads constructed or widened for temporary construction efforts

1 will be removed, sub-based, e-compacted, and replaced with previously stockpiled native
2 topsoil such that the land is restored to pre-construction conditions.

3
4 **Q. PLEASE DESCRIBE THE DESIGN OF THE COLLECTOR SUBSTATION.**

5 A. The collector substation is a fully fenced facility located approximately in the geographic
6 center of the wind farm. The seven feet high fence is topped with one foot of barbed wire
7 for a total of eight feet. The fence has an 18-20 feet wide access gate for equipment and
8 vehicular access and man gate for personal access during operations. Located within the
9 fenced area are equipment such as 34.5 kilovolt (“kV”) medium voltage breakers,
10 switches, support structures with insulators, and bus work used to connect the collector
11 system to the generator step up unit (“GSU”). At the 230kV high voltage side of the
12 substation are switches, breakers, metering unit, support structures with insulators, and
13 bus work used to connect the substation to the transmission pull-off structures. The
14 design of the station takes into account the clearance requirement as recommended by
15 various governing bodies such as Institute of Electrical and Electronics Engineers and
16 NESC. A control house is located within the fenced area and it contains all the
17 controlling devices such as relay panels, Supervisory Control and Data Acquisition
18 (“SCADA”) Panels, communication panel, battery, and Programmable Logic Controls
19 needed for the safe and reliable operation of the site.

1 **Q. PLEASE DESCRIBE HOW THE COLLECTOR LINES WILL BE**
2 **CONSTRUCTED FROM THE TURBINES TO THE COLLECTOR**
3 **SUBSTATION.**

4 **A.** Each wind turbine will be connected to the Project's collector substation by underground
5 power cables called collection lines and fiber optic communication cables. A pad-
6 mounted transformer at each turbine location converts the power from 690 volt to 34.5
7 kV. The permitted paths for the collection lines are included in the construction design
8 drawings. The collection line contractor uses specialized equipment, known as trenchers,
9 to open trenches approximately 12 inches wide and at least 36 inches deep, while
10 simultaneously laying the power and fiber cables at the bottom of the trench. The trench
11 is then backfilled. Junction boxes are installed above-ground where splicing of collection
12 lines is required. In areas where trenching is not permitted, collection lines are installed
13 using horizontal directional bores.

14
15 **Q. PLEASE DESCRIBE HOW THE METEOROLOGICAL TOWERS ("MET")**
16 **TOWERS WILL BE CONSTRUCTED.**

17 **A.** The permanent MET are installed in a predetermined location that gives the best
18 indication of the site's wind resource. The tower is selected based on the hub-height of
19 the turbines to be installed. The foundation for the MET tower will be designed to meet
20 the tower characteristics (height and weight) and the characteristics of the sub surface
21 soil. In order to install the MET tower, the contractor would complete the following
22 tasks:

- 23 • Clear and grub MET tower site;

- Auger hole for foundation;
- Install bolt cage for tower foundation;
- Pour concrete for foundation;
- Assemble tower, including MET stations arms;
- Install tower with required crane; and
- Install instrumentation (anemometer, wind vane, barometer).

Q. EXPLAIN THE SAFETY MEASURES THAT WILL BE EMPLOYED DURING CONSTRUCTION.

A. During construction a full time site safety officer will be present. The safety officer will be responsible for coordinating the safety programs for the entire Project. This includes meeting with the various contractors prior to mobilizing on site to assure their requirements satisfy the minimum requirements established for the site. Weekly “All-Hands” meetings are held to discuss safety. Safety meetings are also held at the start of the Project and continue daily through the duration of the Project life. Frequent safety audits are also conducted by the site supervisor.

O&M

Q. PLEASE DESCRIBE WHAT IS INVOLVED IN THE O&M OF THE WIND FACILITY.

A. The Project is monitored 24/7 by a SCADA system. This system technology enables the monitoring and controlling of the entire Project, including the wind turbines. The

SCADA system collects data and allows real time adjustments to be made to the turbines to ensure optimum performance. The wind technicians are located on site at the O&M building and constantly monitor via inspections the performance of the turbines to ensure that they are operating in a safe, reliable, and efficient manner. The Renewable Operations Control Center, a full-time remote monitoring and control facility located in Juno Beach, Florida, further ensures safe and reliable operations by providing remote real-time monitoring of the Project 24 hours a day, 7 days a week.

Q. HOW MANY PERSONNEL WILL BE EMPLOYED TO CONDUCT O&M?

A. The Project site will employ ten (10) wind technicians, one (1) wind technician lead, and one (1) site manager, who have the following duties:

- Wind Technician – Conduct scheduled/unscheduled maintenances on Wind Turbines.
- Wind Technician Leader – Conducts work on the business side of the wind farm operation; also does some scheduled/unscheduled work on Wind Turbines.
- Wind Site Manager – Oversees all operations of the Wind Farm and manages all employees on site.

Q. PLEASE DESCRIBE THE DESIGN AND PURPOSE OF THE O&M FACILITY.

The O&M building is an approximately 5000 square-foot single story pre-fabricated building assembled on a concrete slab foundation. It is located directly adjacent to the collector substation. The O&M facility will include a main building with offices, spare parts storage, restrooms, a septic system, a shop area, outdoor parking facilities, a turn-around area for larger vehicles, outdoor lighting, and gated access with partial or full-perimeter fencing. The building houses operating personnel, operations, and communication equipment. The purpose of the O&M building is to provide accommodations for O&M personnel whose responsibility is to ensure that the facility will be maintained safely and operated in compliance with applicable North American Electric Reliability Corporation Reliability Standards.

DECOMMISSIONING

WHAT IS THE ESTIMATED LIFE OF THE WIND FACILITY?

The Wind Facility contains an initial Power Purchase Agreement contract term of 25 years, which is also the estimated life of the facility. The estimated life of the Project can be increased through repowering.

WILL THE WIND FACILITY BE DECOMMISSIONED AT THE END OF ITS USEFUL LIFE?

Yes.

WHO WILL BE RESPONSIBLE FOR THE DECOMMISSIONING COSTS?

CRW will be responsible for all decommissioning costs.

PROVIDE AN OVERVIEW OF THE DECOMMISSIONING PLAN.

The decommissioning of the Crowned Ridge project will involve;

- Removal of 130 wind turbine generators and all existing above ground facilities;
- Removal of roads and staging areas that are not desired by land owners to remain in place;
- Restore property or properties to pre-construction conditions;
- Restore property or properties with site specific characteristics such as topography, vegetation, drainage and other unique environment features; and
- Repair county roads impacted by movement of oversized loads or heavy haul vehicles and frequent vehicle trips.

Q. PROVIDE AN OVERVIEW OF THE DECOMMISSIONING PLAN IN THE CONTEXT OF THE CODINGTON AND GRANT COUNTY REQUIREMENTS.

A. CRW will comply with the local requirements concerning the decommissioning of the Project. Per Codington and Grant County requirements, CRW will adhere to the following:

- CRW is responsible for decommissioning the Project, and for all costs associated with decommissioning the Project and associated facilities;
- Five (5) years from the date of issuance of a conditional use permit, the Codington County Board may require a performance bond, surety bond, letter of credit, corporate guarantee, or other form of financial assurance that is acceptable to the Board to cover the anticipated costs of decommissioning the CRW Wind Facility;
- The Grant County Board may also require a performance bond, surety bond, escrow account, letter of credit, corporate guarantee, or other form of financial assurance that

1 is acceptable to the Board to cover the anticipated costs of decommissioning the
2 CRW Wind Facility (Grant County);

- 3 • At least thirty (30) days prior to construction, CRW is required to file a
4 decommissioning plan for Board approval in accordance with the County
5 requirements (Grant County); and
- 6 • Within 120 days of completion of construction, the CRW shall submit to the County a
7 decommissioning plan describing the manner in which the permittees anticipate
8 decommissioning the project (Coddington County).

9

10 **Q. DOES THIS CONCLUDE YOUR TESTIMONY?**

11 **A. Yes.**

1

2 STATE OF FLORIDA)

COUNTY OF PALM BEACH) ss
)

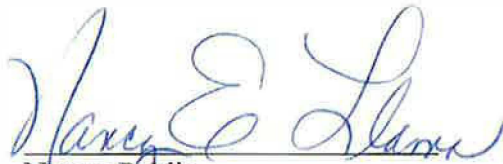
I, Mark Thompson, being duly sworn on oath, depose and state that I am the witness identified in the foregoing prepared testimony and I am familiar with its contents, and that the facts set forth are true to the best of my knowledge, information and belief.



Mark Thompson

Subscribed and sworn to before me this 29 day of January 2019.

SEAL


Notary Public

My Commission Expires _____

